USER MANUAL

SUPER PAR

31pcs*10W LED Auto Show Light

Thank you using this product, before first use, please note the following items:

Note: improper use may be life-threatening. Fire!

♦ Precautions before operation

Please read the "manual"; Check carefully each instruction and operation requirements.

Ensure that the product installation, operation, transportation, warehouse inventory and other kinds of qualified mount guard personnel;

Observe product whether there is transport damage, please contact your supplier immediately, do not use electricity.

♦ Using the environment

1. **This product is only ac AC220 ~ 240 v / 50 ~ 60 hz power supply environment.**
2. **Thunder and lightning, the supply is not stable, suggest that do not use this product.**

This product is not used with flammable, explosive, liquid.

When using, blockage is not less than 0.5 meters, and the light is projected object is not less than 2 meters

This product preservation and use of the site must be kept dry, shall not exceed 80% relative humidity, temperature range is: - 5 oc to 45 oc.

Pay attention to waterproof, dustproof, shockproof.

♦ Product introduction

1. Introduction to lamps and lanterns shape dimension

2.



♦ Product technical parameters

Model number: WX - P025A Full power: 400 w

The input voltage: AC100-240 - v, 50 to 60 / HZ

Light source: Cree10W high brightness Cool white light The linear dimming: 0 ~ 100% dimmer

Quantity（lamp beads）: 31pcs D M X： 2CH Beam Angle: 20 °CRI(Ra)≥85

Colour temperature: standard 7500 k cool white light;3200k-8000k can be customized

Net weight: 8.0 KG

IP rate: IP20

Temperature rise:≦35℃

Cooling system: cold forging fan wind cooling system

The illustration part:

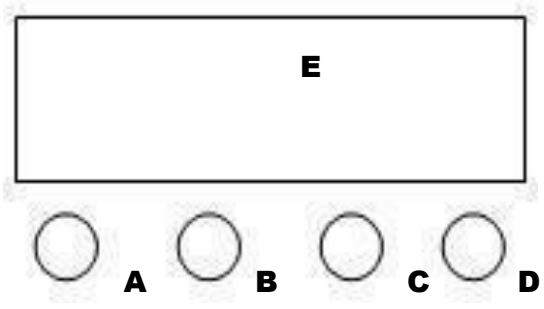

A . Mode

B. UP

C. Down D . Enter

E. LCD Display

Instructions: according to the function keys A cycle of eight different function effect, digital tube of the first two digits represent the current function (see menu).After the two digits represent the function of. Address code. Or speed, parameters.

Press B or C can modify the parameter values. Press the D key to confirm.

3. (LCD display instruction: All the functions are according to the selected and then press the D key to confirm)

No.	Display	Function
1	ADDR001	Two channel address code，（001—512）B、C Up /Down
2	Color W 255	White colors，（000—255）B、C Key change colors

4. DMX512 Channel function

CH No.	Function	Details
CH1	Tuned light	W Tuned light, linear light, from dark to bright
CH2	Total stroboscopic	W Total stroboscopic, from slow to fast

1. Functional features:

Operation is very simple, humanized design, dimming flicker-free, dithering phenomenon, etc.

Can adapt to photography, photography, television, etc. Strict in light of occasions.

2. Common problems and matters needing attention

- **This product belongs to professional purposes, shall not apply to other**
- **After receiving the lamps and lanterns, please check whether the packaging is complete, and unpacking check equipment for damage caused by transportation, please do not use the lamps and lanterns, and or contact with local technical staff as soon as possible**
- **This product for IP20 protection grade, applies only to indoor, lamps and lanterns should keep dry, avoid in damp, overheat or dusty environment, prevent the lamps and lanterns is in contact with the water and other liquids**
- **。Should be paid attention to when using the product: fire, heat, electric shock, short circuit or loss caused by severe or fatal injury, in electricity or to read the instructions before installation,**

follow the safety operation method and pay attention to the description and the warning signs on the equipment

- ♦ Lamps and lanterns in normal work, the environment temperature is not more than 55 degrees Celsius, when the temperature exceeds 50 degrees Celsius, please immediately stop using the equipment
- ♦ Lamps and lanterns on the protection of the shell, lens and light bead a visible damage, if the damage to the point of failure, such as cracks and gash should be replaced
- ♦ When hanging lamps and lanterns, must verify the suspension device to withstand more than 10 times the weight of lamps and lanterns, after the installation and installation buckle lock is firm to verify the lamp hook and no damage, at the same time the use of safe insurance rope as the auxiliary safety of lamps and lanterns, fixed on the suspension device.
- ♦ Must be professionals can the installation of lamps and lanterns, operation And maintenance, and strictly comply with the instructions stated rules in operation
- ♦ Lamps and lanterns should be installed in a well-ventilated place, keep the distance of wall above 50 centimeters, and check the fan and the vent is unimpeded.
- ♦ Do not use the lamps and lanterns is directly projected on combustible objects, the distance between the lamps and lanterns and light objects please keep over 1 meter
- ♦ Before installation, please make sure you are using the power and voltage and lamps and lanterns is identified, each lamps and lanterns should be properly grounded, and electric equipment installation in accordance with the relevant standard process.

Not connected to any other lamps and lanterns will power not to be trusted dimming device

Please don't put any on the light outlet filter or
Other items, not to replace the original factory parts and components

Danger!!!!!!

Please disconnect the power of lamps and lanterns before maintenance

3. According to using frequency and using environment, it is recommended that every 1-6 months to product maintenance and maintenance.

Accumulation of dirt and dust on product will reduce the use of the products and safety performance, serious when may lead to leakage, electric shock accidents!

Before maintenance and maintenance, power off first!

Suggest use wet cotton cloth to clean the lamp body internal oily be soiled, no cleaner, so as not to touch the lens and light bead, etc.

1. Finished clean, please ensure that the product is fully dry before electricity use again.