


200W WATERPROOF ZOOM COB PAR

1. Diagram part :

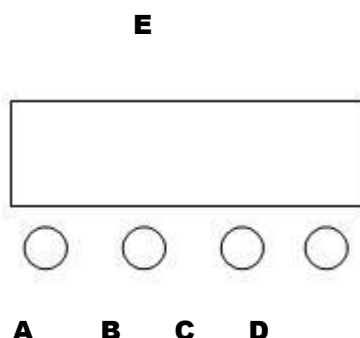

- A . Function
- B . ADD
- C . MINUS
- D . CONFIRM
- E . Display

2 . Operation instructions: Press function key A to cycle through 11 different functional effects, and the first two digits of the digital tube represent the current function (refer to the function table). The last two digits represent the address code or speed, mode, and parameters of the function. Press the B or C key to modify its parameter value. Press the D key to confirm.

3 . Digital display window function comparison table: (press all functions to select and then press D key to confirm and save)

1	d001	3CH B.C key to add and subtract address code value (001-512)
2	d.001	7CH B.C key to add and subtract address code value (001-512)
3	CC01	Jump function B.C key to add and subtract values (01-99)
4	CP01	Gradient function B.C key to add and subtract values (01-99)
5	dE01	Pulse function B.C key to add and subtract values (01-99)
6	dENo	Jump+gradient+pulse function
7	bEbE	sound control function jump + gradient + pulse change
8	r255	Color 1 manual dimming
9	G255	Color 2 manual dimming
10	g.255	Manual zoom
11	dr01	Dimming mode (1-5) 5 dimming modes (Mode 1 Linear Dimming) (Mode 2 instant on and off linear dimming) (Mode 3 low gray scale soft light linear dimming) (mode 4 regular linear dimming slow speed) (Mode 5 low gray scale soft light linear dimming slow speed)

4. DMX3 channel function introduction (.3CH) :

Channels	Function	Function control
CH1	Color 1	0 : off 1-255 dimming

CH2	Color 2	0 : off 1-255 dimming
CH3	Zoom	0 : off 1-255 zoom

5. DMX7 channel function introduction (.7CH) :

Channels	Function	Function control
CH1	Color 1	0 : off 1-255 dimming
CH2	Color 2	0 : off 1-255 dimming
CH3	Zoom	0 : off 1-255 zoom
CH4	Total dimming	0 : off 1-255 dimming
CH5	Strobe effect	0-9 : off 10-255 from slow to fast
CH6	self-propelled function	10-50 Jump change 51-100 Gradient change 101-150 Pulse change 151-200 Jump+Gradient+Pulse change 201-255 sound control
CH7	Function speed	0-255 from slow to fast

Technical specifications:

Voltage: 110/240V, 50/60HZ

Light source: 200W COB

Power: 300W

Color temperature: 3000-6500K

Dimming: 0-100% linear dimming

Control method: DMX512, voice control, self-propelled

Waterproof grade: IP65

Size: 27*18*46cm

Weight: 6.8KG